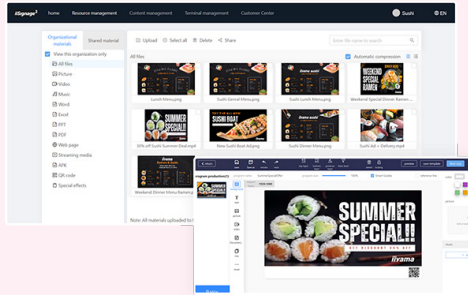# iiyama
professional displays

iiSignage²

4 SIMPLE STEPS TO REACH YOUR AUDIENCE

iiSignage² is a cloud-based CMS software to easily show and control your content and to manage your displays in a secure way. This Content Management System (CMS) gives you total control of your messaging and adversting remotely and safely.
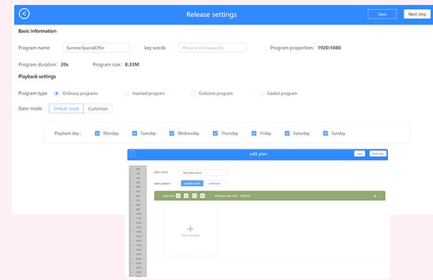

STEP 1

UPLOAD CONTENT

» Upload multiple types of media (Image, Video, Web Content)

» Videos/QR codes/ Web Content can be embedded into Images/Slide shows

» Create distinctive Content programs with the media uploaded

STEP 2

SCHEDULE PROGRAMS

» Schedule Content based on days of the week, dates in advance and time

» Add different content programs to the schedule based on the requirement

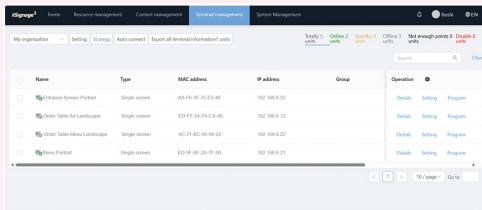» Individual displays can have their own schedules set with the location's specific content programs

STEP 3

SHARE ON DISPLAY

» Each of the displays can be identified by its specific name and can be grouped together based on requirements

» The displays have their individual/grouped schedules for the uploaded content

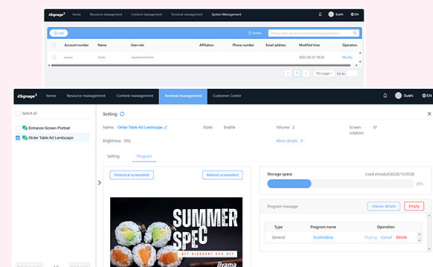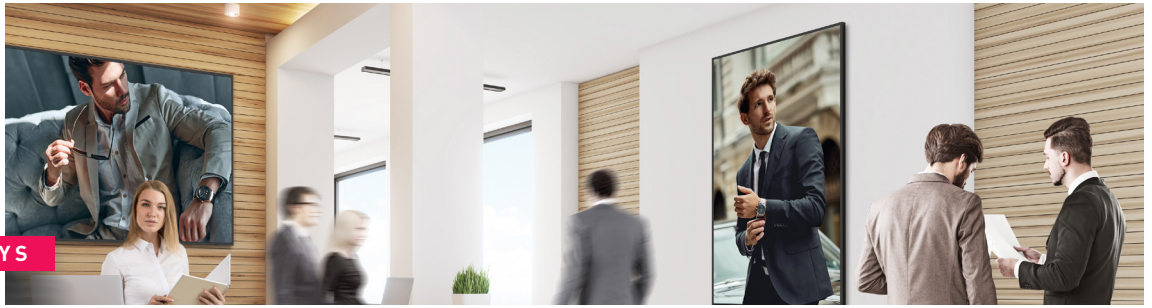» The displays can be programmed to shutdown and turn on based on requirements.

STEP 4

DAILY MANAGEMENT

» Get regular/ timed screenshots of the content running on your screens. Stay up to date on what programs are

» assigned to the screen and also get real time screenshots of what is running on the display.

Watch the step by step
iiSignage² tutorial

For more information visit
iiyama.com/iiSignage2

iiyama
professional displays

LARGE FORMAT DISPLAYS

DIGITAL SIGNAGE - SHARE YOUR STORY IN ANY SPACE

The iiyama professional large format signage displays are ideally suited to numerous industries and environments such as retail, business, education, transport, healthcare and many others.

The displays come in a wide range of sizes (up to 105") along with a variety of resolutions, features and specifications; plus options for landscape and portrait orientation with operating times up to 24hrs a day. Whether installed in mission critical control room facilities or vibrant digital signage for high end retail spaces, iiyama LFD's provide high performance and maximum exposure, ensuring the best impact and effect.

iiSignage²
For more on iiSignage², please visit our landing page

EShare
For more on EShare, please visit our landing page

LH41 SERIES

32"–43"

32" LH3241S-B2
43" LH4341S-B2*

IPS, haze 1%
350 cd/m²
FULL HD (1920x1080)
VGA, HDMI
RS232c, RJ45, USB
Media Player
EMI Class B

LH41 SERIES

43"–55"

43" LH4341UHS-B2
55" LH5541UHS-B2

IPS, haze 1%
500 cd/m²
4K UHD (3840x2160)
VGA, HDMI
RS232c, RJ45, USB
Media Player
EMI Class B

50" LH5041UHS-B2AG

VA, haze 25%
500 cd/m²
4K UHD (3840x2160)
VGA, HDMI
RS232c, RJ45, USB
Media Player
EMI Class B

LH51 SERIES

105"

105" LH10551UWS-B1AG

IPS, haze 1%
500 cd/m²
UW5K (5120x2160, 21:9)
HDMI, DP, USB-C
RS232c, RJ45
OPS PC Slot

LH60 SERIES

32"–65"

32" LH3260HS-B1AG

VA, ELED, haze 25%
500 cd/m²
FULL HD (1920x1080)
HDMI
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
Ultra-thin (depth: 40mm)

43" LH4360UHS-B1AG

VA, ELED, haze 25%
500 cd/m²
4K UHD (3840x2160)
HDMI
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
Ultra-thin (depth: 40mm)

55" LH5560UHS-B1AG

VA, ELED, haze 25%
500 cd/m²
4K UHD (3840x2160)
HDMI
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
Ultra-thin (depth: 40mm)

65" LH6560UHS-B1AG

VA, ELED, haze 25%
500 cd/m²
4K UHD (3840x2160)
HDMI
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
Ultra-thin (depth: 40mm)

LH64 SERIES

86"

86" LH8664UHS-B1AG

IPS, haze 25%
500 cd/m²
4K UHD (3840x2160)
HDMI
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)

LH65 SERIES

43"–86"

43" LH4365UHSB-B1

IPS, haze 1%
800 cd/m²
4K UHD (3840x2160)
HDMI, DP
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

50" LH5065UHSB-B1AG

VA, haze 25%
800 cd/m²
4K UHD (3840x2160)
HDMI, DP
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

55" LH5565UHSB-B1

IPS, haze 1%
800 cd/m²
4K UHD (3840x2160)
HDMI, DP
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

65" LH6565UHSB-B1

IPS, haze 1%
800 cd/m²
4K UHD (3840x2160)
HDMI, DP
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

75" LH7565UHSB-B1

IPS, haze 1%
800 cd/m²
4K UHD (3840x2160)
HDMI, DP
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

86" LH8665UHSB-B1

IPS, haze 1%
800 cd/m²
4K UHD (3840x2160)
HDMI, DP
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

LH75 SERIES

32"–98"

32" LH3275HS-B1AG

IPS, haze 25%
500 cd/m²
FULL HD (1920x1080)
HDMI, DP
RS232c, RJ45, IR
Built-in WiFi
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

43" LH4375UHS-B1AG

IPS, haze 25%
500 cd/m²
4K UHD (3840x2160)
HDMI, DP IN & OUT (MST)
RS232c, RJ45, IR
Built-in WiFi
SDM-S Slot
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

50" LH5075UHS-B1AG

VA, haze 25%
500 cd/m²
4K UHD (3840x2160)
HDMI, DP IN & OUT (MST)
RS232c, RJ45, IR
Built-in WiFi
SDM-L Slot
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

55" LH5575UHS-B1AG
65" LH6575UHS-B1AG

IPS, haze 25%
500 cd/m²
4K UHD (3840x2160)
HDMI, DP IN & OUT (MST)
RS232c, RJ45, IR
Built-in WiFi
SDM-L Slot
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

75" LH7575UHS-B1AG
86" LH8675UHS-B1AG

IPS, haze 25%
500 cd/m²
4K UHD (3840x2160)
HDMI, DP IN & OUT (MST)
RS232c, RJ45, IR
Built-in WiFi
SDM-L Slot
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

98" LH9875UHS-B1AG

IPS, haze 25%
500 cd/m²
4K UHD (3840x2160)
HDMI, DP IN & OUT (MST)
RS232c, RJ45, IR
Built-in WiFi
OPS PC Slot
Signal FailOver
Android 11
iiSignage² (CMS & DMS)
EMI Class B

Legend

PORTRAIT Landscape and Portrait orientation	**18/7 24/7** Max. operating time	**AG coating** AG Coating	**Android OS**	**iiSignage²** iiSignage²
LANDSCAPE Landscape orientation only	**800 cd/m²** Panel brightness	**Speakers**	**Signal FailOver**	**EShare**